

LITHIUM BATTERY CHARGER OWNER'S MANUAL

A. Features:

- 1. Advanced high frequency switching mode power supply technology.
- 2. DC output isolated from AC input .
- 3. Single Input 110Vac and 230Vac or Universal Input 110-230Vac, 50Hz~60Hz.
- 4. Charging parameters are insensitive to the AC input line voltage variations.
- 5. Completely automatic battery charging: CC, CV.
- 6. 2 LEDs: LED1 Red (power on), LED2 Red/green (charging/full).
- 7. Short circuit, over voltage, over-temperature, reverse polarity protections.
- 8. Efficiency > 85%.
- 9. Forced ventilation with fans.


B. Operations:

- Check if your local mains supply conforms to charger's input voltage 110 or 230V. Then connect the charger system to a wall socket. If charger has switch with OFF position, it MUST be set to ON.
- 2. LED1 RED confirms AC power on, and the LED2 GREEN confirms charger connects well.
- 3. Connect the plug or the DC Output cord to battery terminals.
- LED2 RED confirms charger is charging, LED2 GREEN confirms battery fully charged

Note: If this charger with a Relay for Reverse Polarity Protection, it doesn't have output voltage and current when charger AC power on but disconnecting with the battery. It will have voltage and current output when it connects with battery. If the charger has a Fuse instead of Relay for Reverse Polarity Protection, it has output once AC power on.

C. Charging Mode(2-stage):

Step 1: CC(Constant Current) Step 2: CV(Constant Voltage)

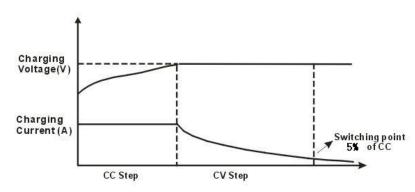

D. Precautions:

- 1. The phenomenon of Sparking is normal when it connects to battery because of high current.
- 1. This charger is designed for charging Lithium type batteries only.
- 2. Avoid charging the wrong type of battery.
- 3. The battery maybe damaged if LED₂ cannot be changed to green after a long time of charging.
- 4. Always place the charger in well-ventilated and dry environments.
- 5. The charger is designed with aluminum case as its heat sink. Do not cover it to avoid the case from being over heated while charging.
- 6.Please attention to DC terminal:

Brown \rightarrow (+) Positive Terminal, Blue \rightarrow (-) Negative Terminal

7. DO NOT disassemble charger. Take it to a qualified service person when service or repair is required.

E. Packing List:

Charger 1pcs
Direct wired DC wires

User manual 1pcs
AC power cord





Warranty Card

Official Importer	ENERGON AKU SANAYI VE TICARET LIMITED SIRKETI
Seller	
Serial Number	
Production Date	
Additional Information	

Shipment date:

Stamp

