

CT 1207.2


STARTER BATTERIES FOR MOTOR VEHICLES



Features

- AGM technology: sealed, maintenance-free, no distillate top-up required
- Calcium-doped lead plates ensure high power density
- Low internal resistance, high discharge characteristics
- High starting power
- Increased vibration resistance, shockproof and frost-resistant housing
- Long service life

Battery design

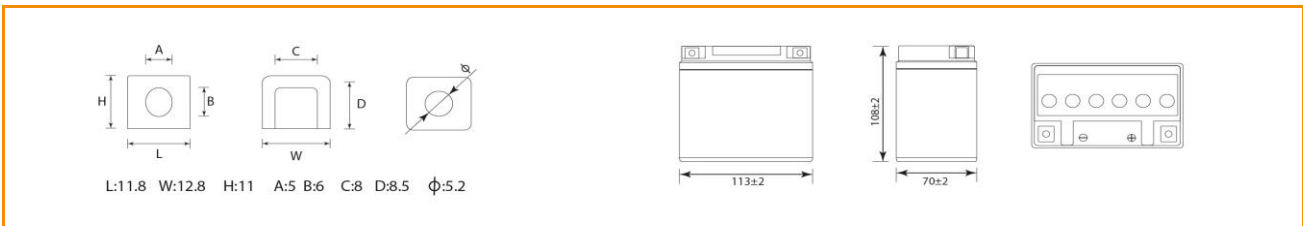

L:11.8 W:12.8 H:11 A:5 B:6 C:8 D:8.5 ϕ :5.2

Specifications

Voltage..... V

Capacity			
10 hour discharge	0,7 A	10,5 V	7 Ah
27 minute discharge	7 A	9,6 V	3,15 Ah
7 minute discharge	21 A	9,6 V	2,45 Ah

Charging current..... 0,5 A

Battery local action.....2% per month


Cycles (25°C)
 100% discharge.....200
 80% discharge.....225
 50% discharge.....500

	JISD (-10°C)	Manufacturer standard (-18°C)
Discharge current	70 A	130 A
Voltage (5 s)	10,1 V	-
EOD voltage	6 V	7,2 V
Discharge time	2 min 18sec	≥ 30 sec

Dimensions (± 2 mm)

Length, mm..... 114
 Width, mm..... 70
 Height, mm..... 108
 Weight with acid, kg..... 2

Discharge characteristics (25 °C)

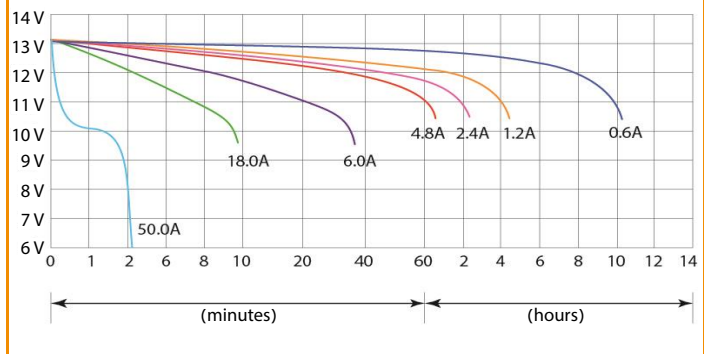

ASTERION CT starter batteries conform to JIS / DIN / EN standards.

Recommended for use in motorbikes, scooters, jet skis, ATVs, UTVs, and gasoline and diesel generators.

Commonly used dimensions of ASTERION CT starter batteries are suitable for all well-known motor brands.

The products are being updated on a continuous basis. Therefore the manufacturer reserves the right to make modifications without prior notice.